


Valerio Specification

Labels | Radiator measurements | Grounds measurements | 150x300mm Recommended grounds locations | Bracket locations

All measurements in millimetres

Vertical

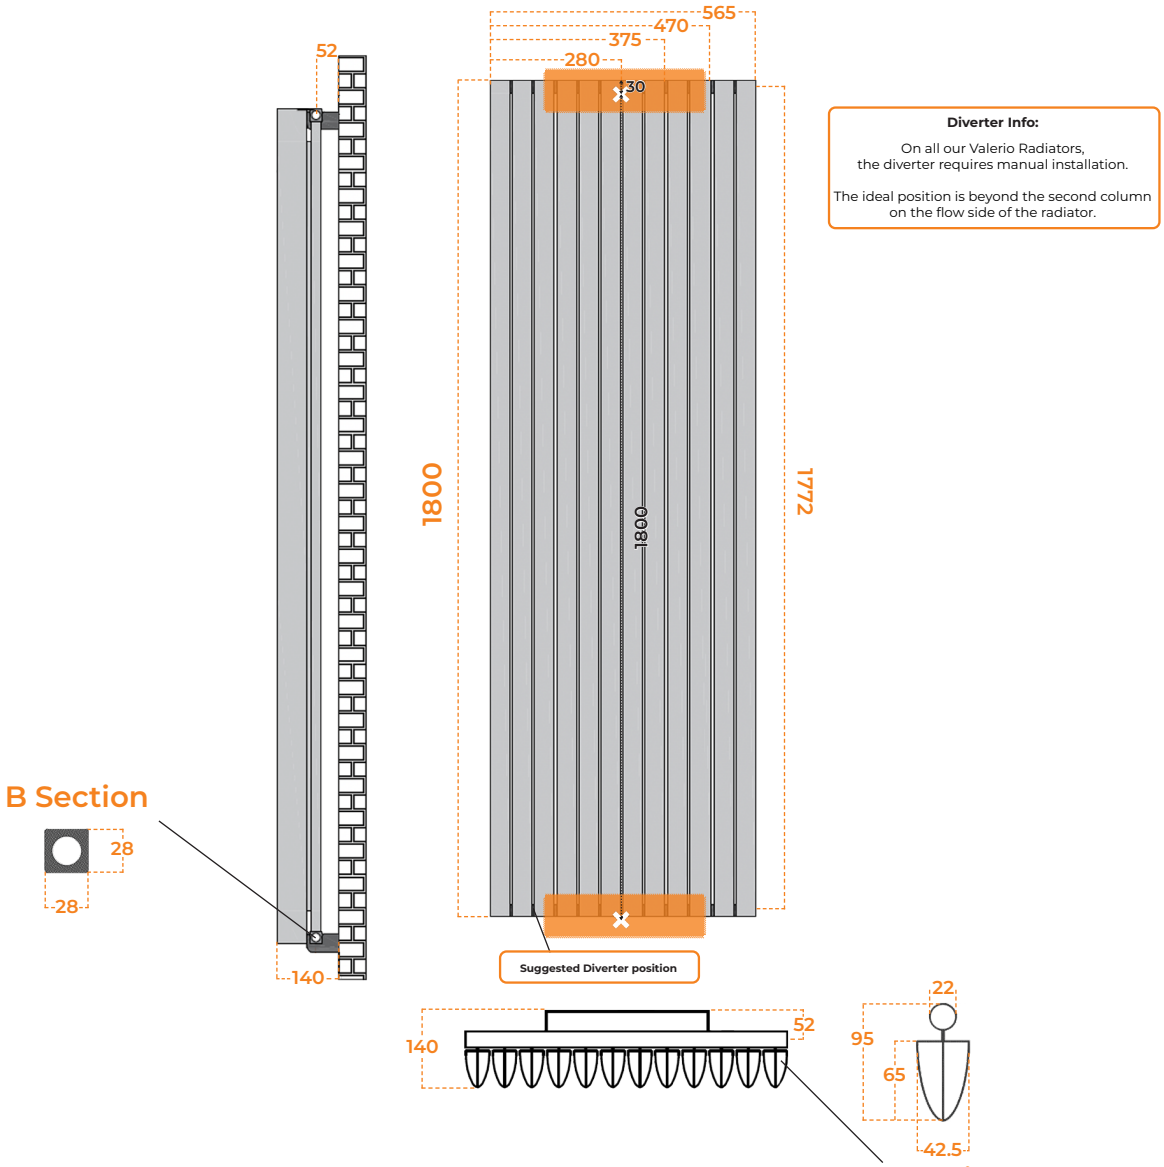

Diverter Info:

On all our Valerio Radiators, the diverter requires manual installation.

The ideal position is beyond the second column on the flow side of the radiator.

Valerio Vertical Water Content:

Radiator Height (mm)	1800
Water Content Per Column (L)	4.46

Additional information for Valerio Vertical and Horizontal:

Connection size for valves: ½" BSP

All Valerio Radiators:

Test Pressure: 13 bar

Max Operating Pressure: 10 Bar

All Vaporo radiators are BOE and pipe centres are the **radiator width plus**:


74mm: Standard Round Vaporo valves
80mm: Traditional Crosshead or Standard TRV Vaporo valves
94mm: Chelsea/Westminster Vaporo valves

Please note due to manufacturing tolerances, pipe centres may vary by +/- 10mm


We recommend that pipe work is not altered until your radiator is on site


Labels | Radiator measurements | Grounds measurements | 150mm² Recommended grounds locations | Bracket locations


All measurements in millimetres





Horizontal

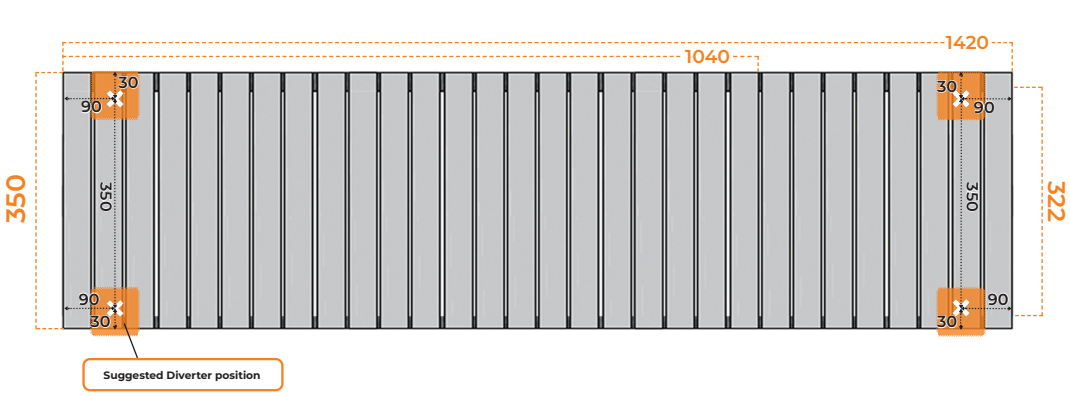



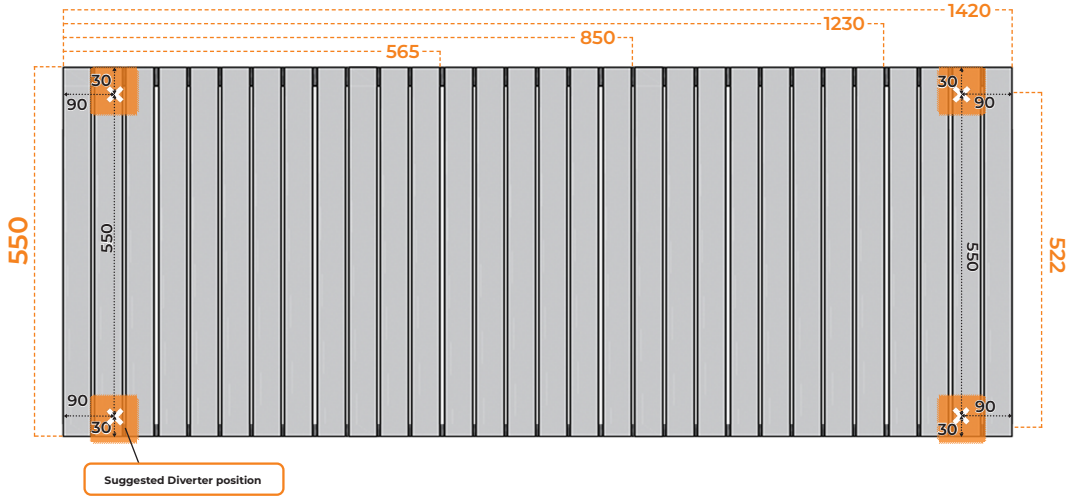






Valerio Horizontal Water Content:

Radiator Height (mm)	350 | **550**
Water Content Per Column (L)	2.56 | **3.17**

Valve Installation Advice for Valerio Vertical and Horizontal:

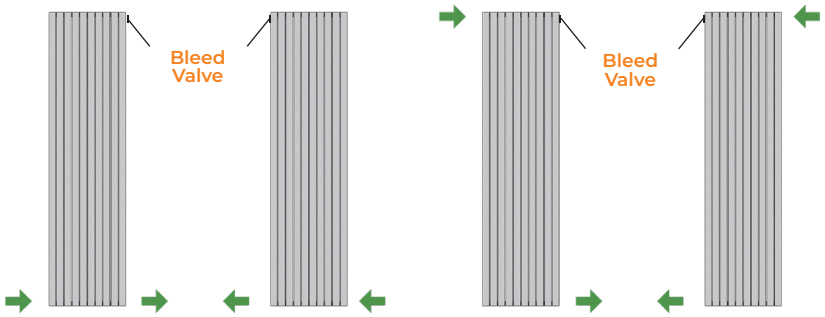

Please ensure your radiator valves are fitted as per the diagrams here.

Our Valerio radiators can be mounted upside down, allowing the flow and diverter positions to be configured to suit the property's existing pipework and plumbing layout.

IMPORTANT: We recommend all Vaporo radiators are fitted using V43 Seal. Overuse of PTFE tape may cause damage.