



Viva Specification

Labels | Radiator measurements | Grounds measurements | 150mm² Recommended grounds locations | Bracket locations

All measurements in millimetres

Vertical

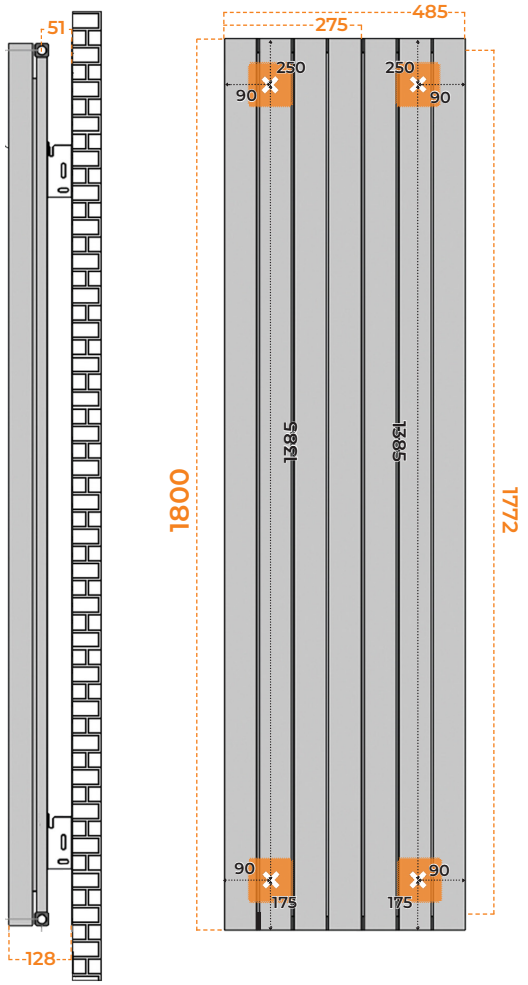

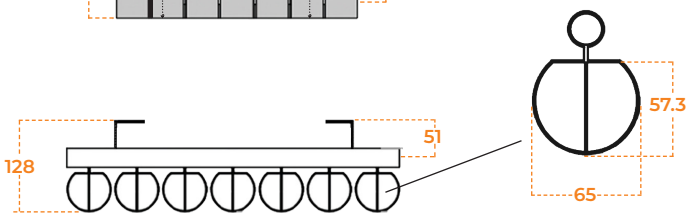

Diverter Info:

On all our Aluminium Radiators, the diverter requires manual installation.

The ideal position is beyond the second column on the flow side of the radiator.

Viva Vertical Water Content:

Radiator Height (mm)	1800
Water Content Per Column (L)	4.197

Additional information for Viva Vertical and Horizontal

Connection size for valves: ½" BSP

All Viva Radiators:

Test Pressure: 12 bar

Max Operating Pressure: 10 Bar


All Vaporo radiators are BOE and pipe centres are the **radiator width plus**:


74mm: Standard Round Vaporo valves
80mm: Traditional Crosshead or Standard TRV Vaporo valves
94mm: Chelsea/Westminster Vaporo valves

Please note due to manufacturing tolerances, pipe centres may vary by +/- 10mm

We recommend that pipe work is not altered until your radiator is on site

Horizontal




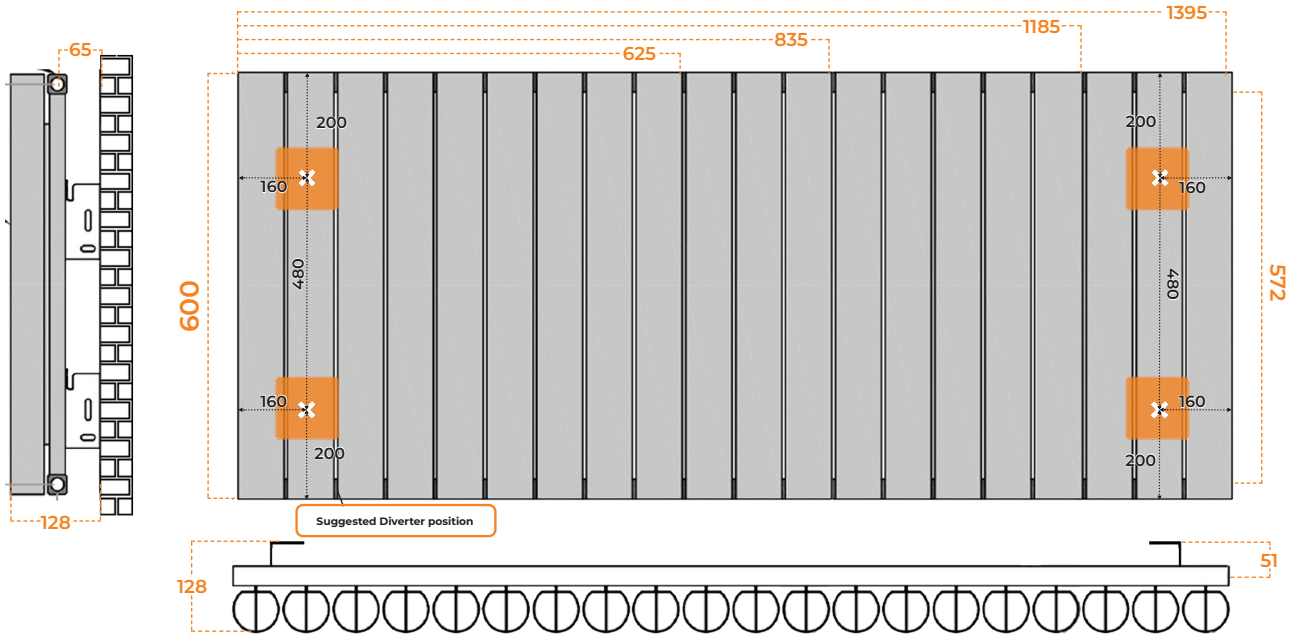

Viva Horizontal Water Content:

Radiator Height (mm)	600
Water Content Per Column (L)	3.199

Valve Installation Advice for Viva Vertical and Horizontal:

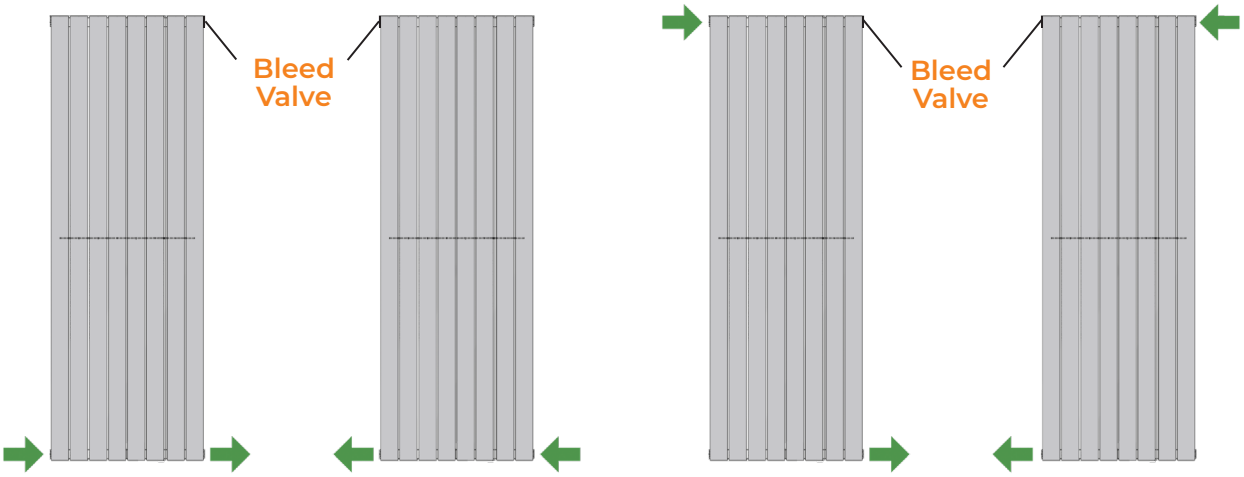

Please ensure your radiator valves are fitted as per the diagrams here.

Our Viva radiators can be mounted upside down, allowing the flow and diverter positions to be configured to suit the property's existing pipework and plumbing layout.

IMPORTANT: We recommend all Vaporo radiators are fitted using V43 Seal. Overuse of PTFE tape may cause damage.