



Alta Specification


Labels | Radiator measurements | Grounds measurements | 150mm² Recommended grounds locations | Bracket locations

All measurements in millimetres

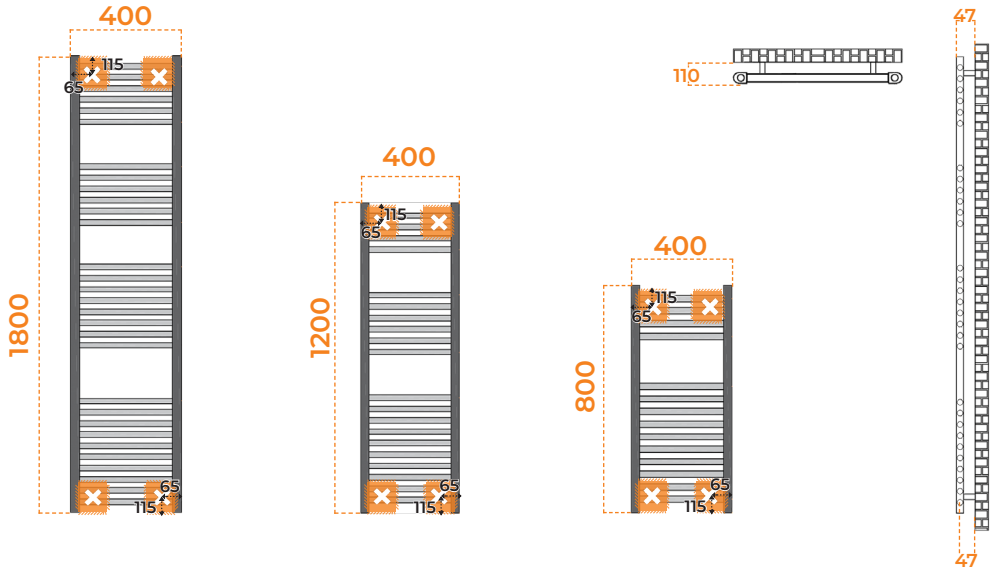

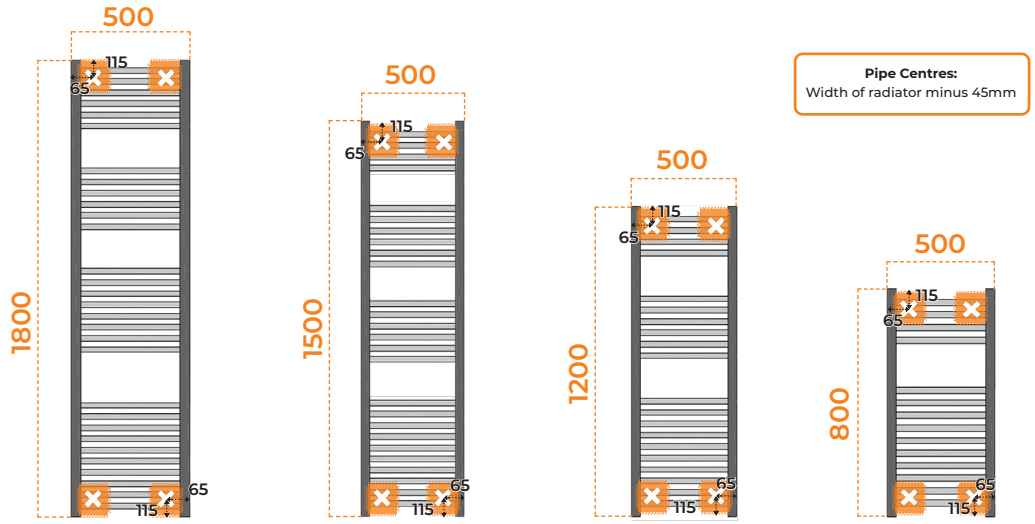

Pipe Centres:
Width of radiator minus 45mm

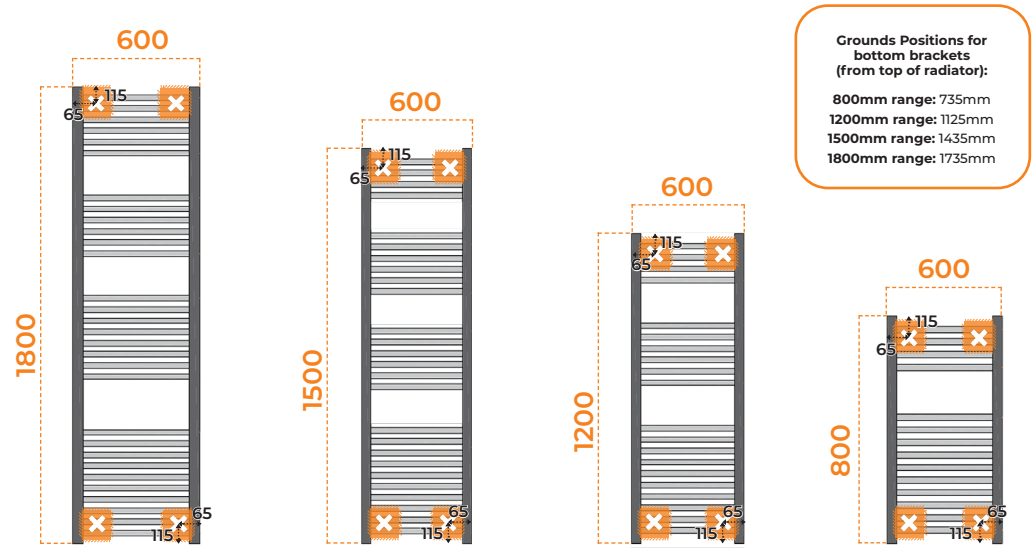

Grounds Positions for bottom brackets (from top of radiator):

800mm range: 735mm
1200mm range: 1125mm
1500mm range: 1435mm
1800mm range: 1735mm

Alta

Radiator Height (mm)	800 — **1800**
Water Content Per Column (L)	2.94 — **8.41**

Connection size for Vaporo Valves: ½" BSP

All Alta Heated Towel Rails:

Test Pressure: 6.5 bar


Max Operating Pressure: 5 Bar

Alta heated towel rails are BOE and pipe centres are the radiator width **minus** 45mm

Please note due to manufacturing tolerances,
pipe centres may vary by +/- 10mm

We recommend that pipe work is not altered until your radiator is on site

Valve Installation Advice for Alta:

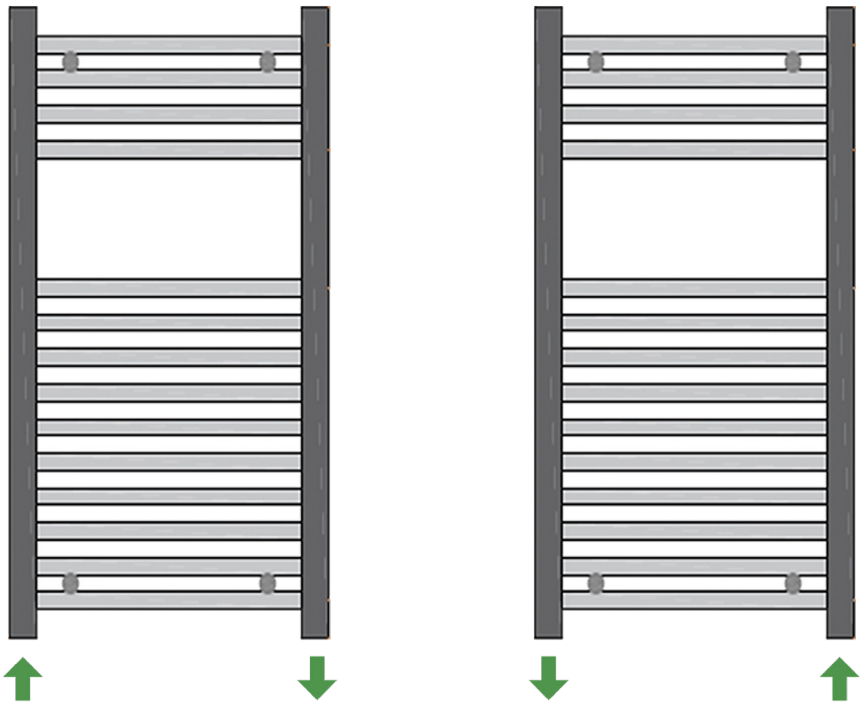

Please ensure your radiator valves are fitted as per the diagrams here.

Our Alta heated towel rails can be mounted upside down, allowing the flow and diverter positions to be configured to suit the property's existing pipework and plumbing layout.

Please contact a specialist or get in touch for more information before doing this.

IMPORTANT: We recommend all Vaporo radiators are fitted using V43 Seal. Overuse of PTFE tape may cause damage.